

MEMOLUB® 10 bar

Single-point, reusable and remote lubrication system



EM

2 SETTINGS

ONE

4 SETTINGS

*Memolub EM and ONE pumps (modules) do not fit on the VISIO Bases



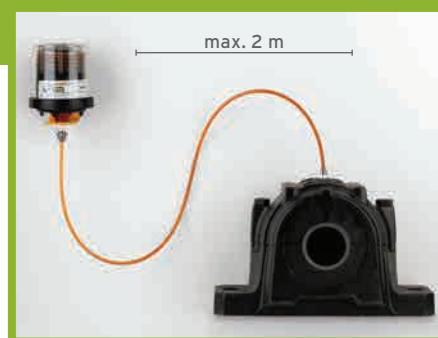

Single point

> EM

120cc model. Designed specifically for controlled micro-lubrication. Specially suited for applications requiring frequent but limited lubricant volume: small bearings, linear guides, chains, electric motors, etc.



> ONE

240cc model. Ideally suited for difficult environments where the lubricant must also plan an even more protective role. Can be used in all types of applications.



All our 10 bar models are battery operated.

Technical specifications

	EM	ONE
		
Cartridge volume	120 cm ³ /4 oz	240 cm ³ /8.1 oz
Settings	12 or 24 months	1, 3, 6 or 12 months
Maximum stroke pressure	10 bar / 140 psi	
Batteries	3 x 1.5 V DC Alkaline batteries	
Remote installation	Up to 2 metres – ø 8 mm external tubing	
Lubricants	Oil and Grease (up to NLGI #2 with an oil base between 100 and 460 cSt)*	
Temperature exposure range	-15°C/5°F to +50°C/122°F**	
Connections	1/4 BSP - 1/4NPT for US version	

* For any other viscosity level please contact your distributor. ** Batteries + lubricant adapted for low temperatures.

MEMO adjustments

	EM		ONE			
						
Adjustments	2 years	1 year	1 year	6 months	3 months	1 month
Average daily output	0.15 cm ³ /day	0.3 cm ³ /day	0.6 cm ³ /day	1.2 cm ³ /day	2.4 cm ³ /day	7.2 cm ³ /day